



ABOUT US

MULTIFIX was established in 1978 – that's over 43 years of experience in innovation and good influence in industrial fixings and fasteners.

MULTIFIX has 2 warehouses in Cape Town, and one in Roodepoort Gauteng, with Distributors both Nationwide across South Africa, and beyond its borders.

The MULTIFIX "Package": -

When it comes to fasteners **MULT** has a big advantage with its comprehensive range of quality products, ranging from small screws to really large screw products, from metal anchors to chemical fixings.

In addition, its drilling systems for concrete, brick, ceramic and steel, compliment its anchor range, as do the screwdriver bits for its extensive range of screw products.

But none of the above are of any benefit to customers without good, well trained efficient and dedicated staff of which **MULT** is extremely proud.

Modernity through technology without losing the human factor is a critical element of **MULT**: 's success, and of course you, our customer always have been and always will come first.

We look forward to many more years of servicing the building industry and allied trades.

marconibeam@multifix.co.za goodwood@multifix.co.za gauteng@multifix.co.za

www.multifix.co.za

SEPTEMBER 2021 CO.REG No. 1984/07784/07



CONTENTS

GROUPING	CONTENTS	PAGE
Medium to Heavy & Chemical Fixings		4 - 11
Pouring Mortar & Adhesive		12 - 15
Pointed Screw Products & More Pointed Screw Products		16 - 31
Light Fixings		32 - 36
Hollow-wall Fixings		37 - 38



CONTENTS

GROUPING	CONTENTS	PAGE
Screw Driving Systems	IMP-KTOR Diamond	39 - 41
Roofing & Cladding LSF		42 - 48
Blind Rivets		49 - 50
Medium Fixings		51 - 53
MULTIFIX Rotary Hammer	BOSCH Invented for life	54 & 65
Drilling Systems Chasing and Chiseling Tools		55 - 64



CONTENTS

GROUPING	CONTENTS	PAGE
Nuts & Bolts		66
Abrasives	MACTIFIX MAC	67, 69 - 70
Blades & Saw Blades	MATTER AND THE STATE OF THE STA	71
Spacers		72
Wire Nails		73
Tapes Butyl, Flashing	COLD COLD COLD COLD COLD COLD COLD COLD	68
Personal Protective Equipment		74
Sundries		75

6 Marinus Road Marconi Beam, Milnerton, Cape Town **021 552 0383** 7 Vasco Boulevard Goodwood, Cape Town **021 591 9129**



MULT FIX SHIELD ANCHORS



SHIELD ONLY

DIA	HOLE SIZE
M6	12
M8	14
M10	16
M12	20
M16	25



Hooks and eyes available M5, M6, M8, M10, M12



LOOSE BOLT

REF	BOLT DIA	HOLE SIZE	MAX FIX THICKNESS
M6 10LB	M6	12	10mm
M6 25LB	M6	12	25mm
M6 40LB	M6	12	40mm
M8 10LB	M8	14	10mm
M8 25LB	M8	14	25mm
M8 40LB	M8	14	40mm
M10 10LB	M10	16	10mm
M10 25LB	M10	16	25mm
M10 50LB	M10	16	50mm
M10 75LB	M10	16	75mm
M12 10LB	M10	20	10mm
M12 25LB	M10	20	25mm
M12 40LB	M10	20	40mm
M12 60LB	M10	20	60mm
M16 15LB	M16	25	15mm
M16 30LB	M16	25	35mm
M16 60LB	M16	25	60mm



STUD PROJECTING

REF	BOLT DIA	HOLE SIZE	MAX FIX THICKNESS
M6 10P	M6	12	10mm
M6 25P	M6	12	25mm
M6 60P	M6	12	60mm
M8 10P	M8	14	10mm
M8 25P	M8	14	25mm
M8 60P	M8	14	60mm
M10 15P	M10	16	15mm
M10 30P	M10	16	30mm
M10 60P	M10	16	60mm
M12 15P	M12	20	15mm
M12 30P	M12	20	30mm
M12 75P	M12	20	75mm
M16 15P	M16	25	15mm
M16 30P	M16	25	35mm
M16 75P	M16	25	75mm



MULTEFIX THRU-ANCHORS

HIGH TENSILE Z/P



CONCRETE ANCHOR ONLY!

DIA + LENGTH	HOLE SIZE
10 x 75	10mm
10 x 90	10mm
10 x 115	10mm
10 x 150	10mm
12 x 90	12mm
12 x 110	12mm
12 x 130	12mm
12 x 150	12mm
12 x 180	12mm
16 x 90	12mm
16 x 90	16mm
16 x 110	16mm
16 x 130	16mm
16 x 150	16mm
16 x 175	16mm
20 x 110	20mm
20 x 160	20mm
20 x 200	20mm
24 x 180	24mm
24 x 260	24mm

MILD STEEL Z/P



DIA + LENGTH	HOLE SIZE
8 x 60	8mm
8 x 75	8mm
10 x 75	10mm
10 x 90	10mm
12 x 110	12mm
12 x 150	12mm
16 x 110	16mm
16 x 150	16mm

CONCRETE ANCHOR ONLY!

- Available in zinc plated high tensile or mild steel
- High pull-out value thru-fixing
- A complete range of heller SDS-plus or SDS-max drill bits available to ensure accurate hole sizes

THUNDERB (>LT

EFFECTIVE IN: Concrete, Brick, Wood, Marble, Block & Stone

HEX HEAD		
SIZES		
DIA	LENGTH	
M5	30	
CIVIS	50	
	30	
M6	50	
	75	
	60	
M8	75	
	100	
	60	
M10	75	
IVITO	100	
	150	
	75	
M12	100	
	150	
M16	100	
M16	150	



INSTALLATION

To achieve maximum loads the installation process needs to be carried out as follows:



using drill of correct diameter, ensuring the hole is deep enough to accommodate dust caused by threading action.

not excessively worn.



2.Remove any loose dust



3.Screw in the Thunderbolt Apply a slight downward pressure to start the selftapping action.



4. Tighten the Thunderbolt while tightening, unscrew one turn and re-tighten, ensuring not to overtighten with excessive torque.



5. For optimum performance, a torque wrench should be utilised. Do not exceed tightening torque shown in the setting detail chart (for max. tightening torque into technical advice line).




6 Marinus Road Marconi Beam, Milnerton, Cape Town 021 552 0383

7 Vasco Boulevard Goodwood, Cape Town 021 591 9129



THE NEW AGE FIXING!

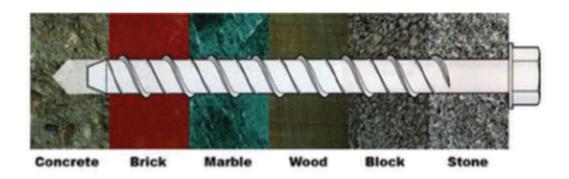

The Thunderbolt Anchor range of fixings provided the construction professional with a single fixing Anchor for the majority of fixing needs.

The fixings are suitable for carpenters, plumbers, electricians, builders, roofers, door and window installers, fire, security and telecommunications installers, shopfitters, fencing contractors, ceiling contractors, exhibition contractors, carpet fitters, maintenance heating and ventilation engineers, cladding contractors, kitchen fitters and public utility contractors.

- Thread designed to provide positive anchorage into the substrate.
- Thread provides safe anchorage over full embedment of anchor.
- "No expansion" gives close-to-edge fixing ability.
- Single thread designed to give maximum grip with minimum insertion torque.
- Balancing thread, designed to ensure correct alignment of anchor with drilled hole.
- Threading system allows for TOTAL removal of anchor from substrate, no shield left behind to rust in the event of removing the anchor.
- Can be re-used in certain instances.





CHEMICAL FIXINGS

CHEMFIX PURE EPOXY 385ML



CHEMFIX VINYLESTER 410 VESF



POLYESTER SF 300ML

CHEMFIX/MULTIFIX



METOLUX CLENZE SANITIZING SPRAY

385ml



METOBOND EPOXY
BUILDING ADHESIVE



METOSET POURABLE
STYRENE-FREE
ANCHORING AND REPAIR
SYSTEM



SEE FOLLOWING PAGES FOR DETAILS OF ABOVE PRODUCTS







CHEMFIX CH+ 410 SF

Product Name: Chemfix Ch+ Vinylester Resin, Styrene Free

DESCRIPTION

Chemfix Vinylester Resin is a high performance, rapid-curing two-part chemical anchoring system based on a high reactivity unsaturated Vinylester resin in Methacrylate monomers. Applied in one single action this hybrid resin will produce a cost effective, strong, chemical resistant fixing.





FEATURES



- Critical load and overhead applications
 Very high chemical resistance
- Suitable for underwater applications



HARDENING TIME

BASE MATERIAL TEMPERATURE (°C)	GEL TIME (min)	MINIMUM LOADING TIME (min)	MINIMUM LOADING TIME WET HOLES (min)
25	3	30	60
15	6	35	70
5	12	50	100
-5	50	90	180



Hollow Substrate Fixing



Concrete/ Solid Wall Fixing

ASK FOR A PULL-OUT TEST ON SITE, QUICK AND EASY.



7 Vasco Boulevard Goodwood, Cape Town **021 591 9129**





POLYESTER RESIN STYRENE FREE

Product Name: Multifix MPE 300 PESF Chemfix CPE 300 PESF

DESCRIPTION

PESF Low Odour Resin is a high performance, rapid curing two-part chemical anchoring system based on a modified Polyester resin in Methacrylate monomers. Applied in one single action, this resin will produce a cost effective, strong, chemical resistant fixing.



FEATURES

- Non-flammable
- Very low odour
- Chemical resistance
- Suitable for close-edge applications
- Suitable for use in concrete, brickwork, stone and hollow structures, for medium duty applications
- Suitable for fixing wall tiles, studs and large screws
- Available in 300ml











Perforated sleeve for use in hollow block or hollow brick





















Hollow Substrate Fixing

Solid Material Fixing

Available from our distributors throughout South Africa





CHEMFIX PURE EPOXY

Product Name: Chemfix Pure Epoxy 385ml

DESCRIPTION

Chemfix Pure Epoxy is a high performance twocomponent epoxy resin system with high pull-out values. The epoxy resin is odourless and solvent free. This resin has a very high chemical resistance.









FEATURES

- Effective fixing in concrete
- Solvent Free
- Suitable for variable embedment
- Can be used in damp conditions and underwater applications
- High performance especially for rebar applications
- Product has no shrinkage
- For use in concrete
- Ideal for hole depths 250mm plus

BASE MATERIAL TEMPERATURE (°C)	GEL TIME (min)
25	15
20	16
15	18
5	21



STUDS, NUTS AND WASHERS:

Mild steel Z/P, and High tensile Z/P studs.

Nuts available with flat washers.

A full set of technical data and values available on request.

6 Marinus Road Marconi Beam, Milnerton, Cape Town 021 552 0383

7 Vasco Boulevard Goodwood, Cape Town 021 591 9129





SURFACE HYGIENE SPRAY

Product Name: Metolux CLENZE Surface Spray
















parts

plastics



- Acts immediately to clean the work surface.
- Suitable for all types of surfaces.
- Easy to use; no wiping required.
- Versatile product with multiple uses.
- Composition Alcohol 70%

DESCRIPTION

Spray for cleaning any type of surface.

The new hydro-alcohol solution for maintaining the cleanliness and hygiene of the work environment.

CHARACTERISTICS

- Acts immediately to clean the work surface.
- Suitable for all types of surfaces.
- Easy to use; no wiping required.
- Versatile product with multiple uses.

MULTIPLE USES INCLUDING:

- Shared work surfaces and workshop tools (e.g. drills, screwdrivers, computers).
- Vehicle exteriors: door handles, windows, panels, doors, fuel gas door, windshield wiper, etc.
- Vehicle interiors: steering wheel, gear shift, window buttons, radio, rearviewmirror, etc.
- Textiles:seats, upholstery, dashboard, safety belts, etc.
- Electronic devices: computers, mobile phones, scale, touch screens, etc.
- Tools: scissors, spray guns, compressors, etc.
- Furniture:office furniture, lockers, benches, lifts, etc.







EPOXY BUILDING ADHESIVE

METOBOND 1-1



2 Part General Purpose Thixotropic Epoxy Building Adhesive

- Extremely strong structural adhesive with high chemical resistance
- Adhesive for concrete, brick, glass, metals and marble

Pack Size	Pallet
3kg	80



Product Description

General Purpose Epoxy, Building Adhesive, Metolux Metobond has a thixotr opic mixed consistency. It is designed predominantly for vertical and overhead applications and is offered as an extremely powerful structural adhesive with high chemical resistance. The product has a unique packaging system which houses the resin and hardener in one container, the hardener housed in the dish lid.

Typical Uses

As a structural adhesive for:
Concrete materials, Brick and Mortar or
stone, Ceramic, Tile or Glass elements,
all metals incl Iron, Aluminium, Copper etc.
Marble, Wooden structures, adhesive or
repair applications, bedding in (eg floor tiles),
gap crack filling in voids, grouting, ideal
for horizontal (overhead) or vertical use.

Application

Apply by trowel, spatula or scraper with a minimum thickness of 1mm. Ensure adhesion takes place while the product is still mobile and tacky. Components should be supported during curing to prevent slippage.

Gel/ Cure Times

		Working Times @ Different Ambient ^o C for 100g mass of mixed product									
Temp ^o C	0	0 5 10 15 20 25 30 35 40									
Gel Time (min)	115	100	60	48	45	33	25	19	18		
Cure Time (min)	2040	2040 1860 1200 960 570 420 390 360 330									







POURABLE ANCHORING RESIN





- Two Part liquid repair mortar for crack repair or to fix rebar or threaded rod into concrete or brick.
- Unsaturated polyester resin, styrene free.
- Metallic can: 5Kg (comp. A polyester resin) and plastic tube 100g (comp. B - hardener)





Gelling and Curing Times

Base Material Temperature	35	30	25	20	10	5
Typical Gel Time (mins)	6	8	12	18	40	55
Min. Load Time (mins)	50	60	90	120	180	240

PULLOUT TESTING MACHINES




HEAVY DUTY PULLOUT TESTING MACHINE 145KN

PULLOUT
CAPACITY
25KN
FOR LIGHTER
LOADS




WE DO PULLOUT TESTS ON SITE, SIMPLY REQUEST!

SCREW PRODUCTS

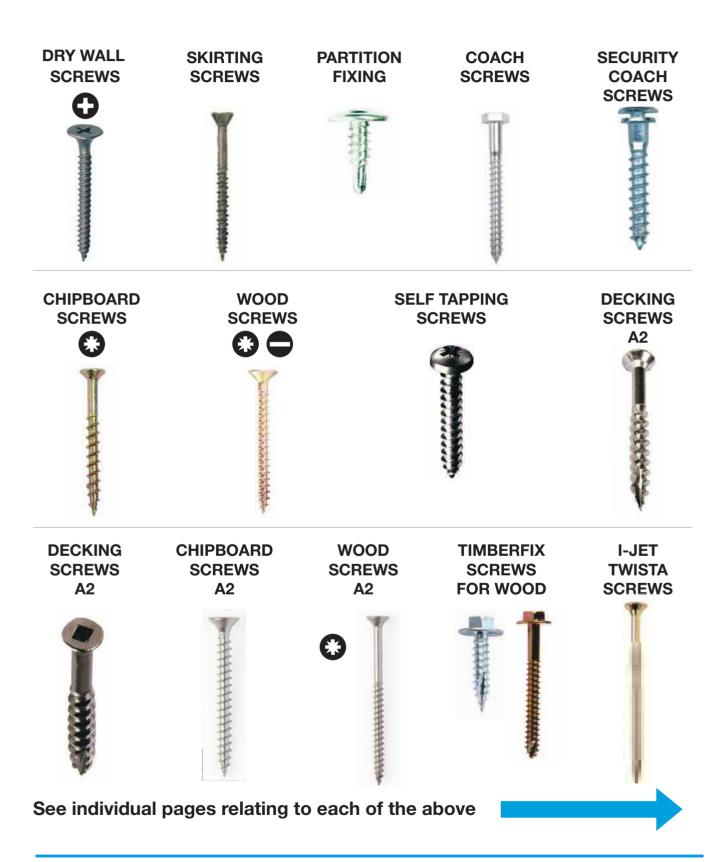



DRY-WALL SCREWS

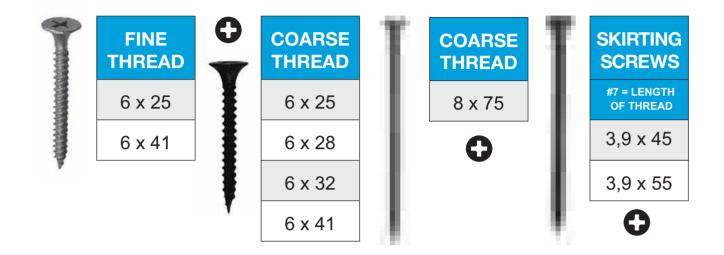

Self-drill dry-wall screws, see page 46 for Light steel frame fasteners (LSF) and more

PARTITION FIXING MADE FOR THE JOB



#8 x 13 TRUSS HEAD SELF **DRILL SCREW**

PH2 BITS ECONOMY RANGE FOR DRY-WALL SCREWS,

AND Wera PH2



LONG-LIFE BITS FOR SELF-DRILL SCREWS.

COACH SCREWS & SECURITY COACH SCREWS

COACH SCREWS

DIA	LENGTH
M6	30mm
M6	40mm
M6	50mm
M6	60mm
M6	75mm
M8	30mm
M8	40mm
M8	50mm
M8	60mm
M8	75mm
M8	90mm
M8	100mm
M8	120mm
M10	40mm
M10	50mm
M10	60mm
M10	75mm
M10	90mm
M10	100mm
M10	125mm
M10	150mm
M12	40mm
M12	50mm
M12	60mm
M12	75mm
M12	90mm
M12	100mm
M12	125mm
M12	150mm



SECURITY COACH SCREWS

DIA	LENGTH
M8	60mm
M8	75mm
M10	60mm
M10	75mm

SECURITY
COACH SCREWS
AND HEX HEAD
COACH SCREWS,
USED IN CONJUNCTION
WITH OUR
10MM BLUE PLUG
OR 11MM GREEN PLUG



6MM COACHSCREW WITH 10MM BLUE PLUG



8MM COACHSCREW WITH 11MM GREEN PLUG



6 Marinus Road Marconi Beam, Milnerton, Cape Town **021 552 0383** 7 Vasco Boulevard Goodwood, Cape Town **021 591 9129**

CHIPBOARD SCREWS



- Yellow Zinc and Zinc Plated (Silver)
- A full range of sizes from 12mm - 100mm long
- Boxed in 500's/1000's for better stock control
- Good quality at competitive prices
- Pan head available in zinc-plated and black
- Some sizes available in packs of 100

STAINLESS STEEL CHIPBOARD SCREWS



FULL THREAD



PART THREAD

DIA	LENGTH
5,0mm	25mm
5,0mm	40mm
5,0mm	50mm
5,0mm	60mm
5,0mm	70mm
5,0mm	100mm

DIA	LENGTH
4.0mm	30mm
4,0mm	40mm
4,0mm	50mm
4,0mm	60mm
4,0mm	70mm

- Boxed per 100/200
- Pozi 2 drive
- Good availability
- 🕒 Best driven with **Wera 🚻** bits for positive drive





WOODSCREWS



STAINLESS STEEL SLOTTED AND POZI



AND HARDENED STEEL Z/P











SELF TAPPING SCREWS



Stainless steel and zinc-plated



- A full range available in all head forms
- Zinc-plated and stainless steel
- Blunt point stainless steel
- Pozi or slotted
- Pozi bits available in hardened steel and stainless steel for all screw sizes

STAINLESS STEEL DECKING SCREWS



DIA (mm)	LENGTH
5,0	40
5,0	50
5,0	60
5,0	70
5,0	100



- Made for the job!
- Self countersinking head
- Notch point for easier driving
- Werα ST.ST Bits available for extra neat work and corrosion resistance

IF THEY ARE NOT STAINLESS STEEL
- THEY WILL RUST !!

DRIVE: TORX T25
AND POZI #2

STAINLESS STEEL DECKING SCREWS

FOR CLIP FIXING



DIA (mm)	LENGTH
4,0	40
4,0	50

DRIVE: SQUARE #1



- V Head with ribs
- Stainless steelNO rusting
- Notch point -No pre-drilling required
- Good quality is cheap!





Timberfix® HEX HEAD SCREWS FOR WOOD

Applications:

- Garage Doors
- Pergolas
- Roof Trusses
- Any Timber joins



No pre-drilling required

Finish: Zinc-plated and yellow zinc

DIA GAUGE	DIA (mm)	LENGTH
#12	5.5	28
#12	5.5	38
#12	5.5	50
#12	5.5	65
#12	5.5	75 🜟
#12	5.5	90
#12	5.5	115
#12	5.5	125
#12	5.5	150
#14	6.3	90
#14	6.3	



Notched point drills into timber

Reduced splitting of timber because of the sharp notched point

75mm - also available in Stainless Steel

5/16" and 3/8" nut setters available for driving screws in

i-JET TWISTA



SEE MORE...



6 Marinus Road Marconi Beam, Milnerton, Cape Town **021 552 0383** 7 Vasco Boulevard Goodwood, Cape Town **021 591 9129**

THE ULTIMATE HARDWOOD FIXING SCREW

Introducing a new range of hardened steel screws that are engineered perfectly for fast, easy hardwood fixing.



Double countersunk head with ribs.
Countersinks head withou splitting the timber.



Saw-tooth threads. Reduces drive torque even in hard wood.



Pozi head recess.

Best with Wera Torsion bits on smaller diameters (3.0, 3.5, 4.0) and Wera Impaktor bits on larger diameters (5.0 and 6.0)



Reamer spiral above thread.
Reduces shank contact friction on larger length screws.



Large notched point. No pre-drilling required.



Wax Jubricated threads
 No pre-drilling required
 Reduces the risk of splitting timber

i-JET TWISTA

YELLO	W ZINC
DIA X LENGTH	DRIVE
3,0 x 16	PZ1
3,5 x 16	PZ2
3,5 x 20	PZ2
3,5 x 25	PZ2
3,5 x 30	PZ2
3,5 x 40	PZ2
3,5 x 50	PZ2
4,0 x 16	PZ2
4,0 x 20	PZ2
4,0 x 25	PZ2
4,0 x 30	PZ2
4,0 x 40	PZ2
4,0 x 50	PZ2
4,0 x 60	PZ2
4,0 x 70	PZ2



YELLO	W ZINC
DIA X LENGTH	DRIVE
5,0 x 40	PZ2
5,0 x 50	PZ2
5,0 x 60	PZ2
5,0 x 80	PZ2
5,0 x 100	PZ2
6,0 x 70	PZ3
6,0 x 100	PZ3
6,0 x 120	PZ3
6,0 x 160	PZ3

IT'S ALL OF THE ABOVE AND MORE! LIKE YOU'D EXPECT FROM MULT#FIX*

CLASS 3	DIA X LENGTH	5,0X40	5,0X50	5,0X60	5,0X80	5,0X100	6,0X120	6,0X160
	DRIVE	PZ2	PZ2	PZ2	PZ2	PZ2	PZ3	PZ3



Timberfix® MAX®

- HARDENED TIMBER FIXING SCREWS
- * TEST RESULTS AVAILABLE!
- NO PRE-DRILLING REQUIRED FOR MOST TIMBERS
- FAST, EFFICIENT, LABOUR SAVING
- JOINS TIMBER UP TO 400MM PLUS

- 2 DIAMETERS M6 AND
 M8 AND LENGTHS FROM
 80MM TO 300MM
- WERA LONG LIFE IMPAKTOR BITS TO SUIT
- GOOD AVAILABILITY, EX STOCK FROM OUR 3 WAREHOUSES AND DISTRIBUTORS COUNTRY-WIDE






TORX 30 AND TORX 40 BITS EX STOCK

ALREADY
A
PROVEN
SUCCESS!



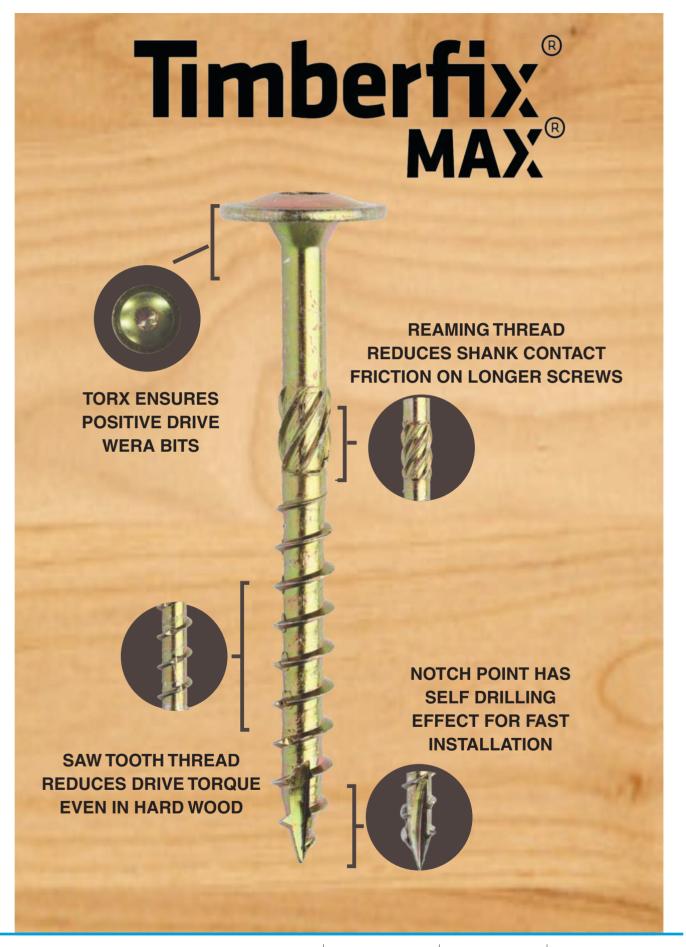




6 Marinus Road Marconi Beam, Milnerton, Cape Town **021 552 0383** 7 Vasco Boulevard Goodwood, Cape Town **021 591 9129**

Timberfix® MAX®

- TOP QUALITY, HARDENED, TIMBERFIXING SCREWS FROM **MULT** FIX
- COMPLIES WITH SABS 1273 : 2011
- PULLOUT AND SHEAR VALUES AVAILABLE
- EX STOCK AVAILABILITY
- TORX30 AND TORX40 Werα BITS EX STOCK

 ASK FOR ONE OF OUR TO TEST IT WITH YOU



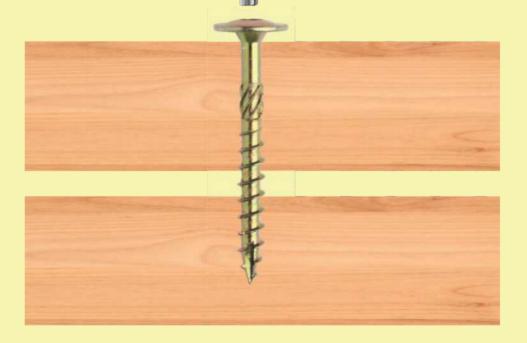


Timberfix® MAX®

DIA	OVERALL LENGTH	THREAD LENGTH	DRIVE	QUANTITY PER BOX
6	70	45	Tx30	100
6	100	65	Tx30	100
6	120	65	Tx30	100
6	140	70	Tx30	100
6	160	70	Tx30	100
6	180	70	Tx30	100

DIA	OVERALL LENGTH	THREAD LENGTH	DRIVE	QUANTITY PER BOX
8	70	45	Tx40	100
8	80	50	Tx40	100
8	100	50	Tx40	100
8	120	80	Tx40	50
8	140	80	Tx40	50
8	160	80	Tx40	50
8	180	80	Tx40	50
8	200	80	Tx40	50
8	220	80	Tx40	50
8	240	80	Tx40	50
8	260	80	Tx40	25
8	280	80	Tx40	25
8	300	80	Tx40	25

MULT FIX HAMMER SCREWS



- Polyethylene plug no seperating on impact
- Fast, simple fixing
- Hammer no screwing
- Single element plug and screw
- Convenient box packing
- Ideal for frame fixing
- No premature expansion
- Quality at a good price
- *Sizes available in stainless steel

CSK SIZES AVAILABLE					
HOLE SIZE (mm)	DIA x LENGTH	MAX FIX THICKNESS (mm)			
5	M5 x 30	5			
5	M5 x 40	10			
6	M6 x 35	5			
6	* M6 x 40	10			
6	* M6 x 60	20			
6	M6 x 75	25			
8	M8 x 45	5			
8	M8 x 60	20			
8	M8 x 80	30			
8	M8 x 100	40			
8	M8 x 120	60			

PAN HEAD SIZES AVAILABLE					
HOLE SIZE (mm)	DIA x LENGTH	MAX FIX THICKNESS (mm)			
6	M6 x 35	8			
6	M6 x 40	10			
6	M6 x 45	10			

MULT®FIX® WALL PLUGS

STRONG FIXING FOR BRICK AND CONCRETE




BOX
PACKED
FOR EASY
STOCK
CONTROL



DIA X LENGTH	HOLE SIZE	SCREW DIA
M5X25	5mm	3,5mm
M6X30	6mm	4,0 - 4,2mm
M8X40	8mm	5,5mm
M10X50	10mm	6,0 - 8,0mm C/S
M12X60	12mm	10,0mm C/S
M14X75	14mm	12,0mm C/S

MULT FIX 2-WAY EXPANSION PLUGS

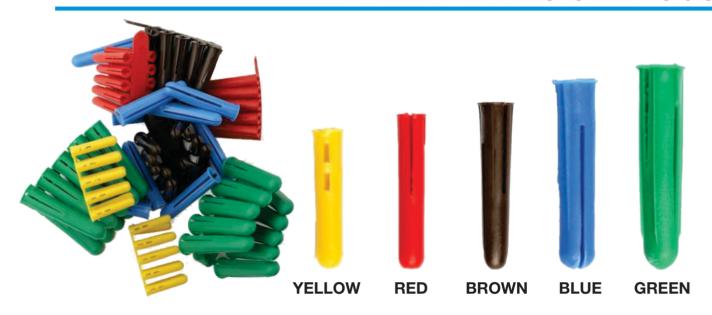

COLOUR	PLUG LEN. (mm)	DRILL SIZE (mm)	SCREW SIZES (mm)			COACH SCREWS (mm)			
YELLOW	22	5,0	3,0	3,5	4,0				
RED	34	5,5		3,5	4,0	5,0			
BROWN	40	7,0			5,0	5,5			
BLUE	45	10,0					6,0	8,0	
GREEN	50	11,0						8,0	10,0



2 - WAY EXPANSION PLUGS, SUPPLIED WITH 2 CORRESPONDING HELLER SDS DRILLS PER 1'000 PLUGS

The security coach screw with the ever-popular **MULT** green plug or M10 **MULT** blue plug.


6 Marinus Road Marconi Beam, Milnerton, Cape Town **021 552 0383** 7 Vasco Boulevard Goodwood, Cape Town **021 591 9129**



MULT®FIX® MASONRY NAILS

DIA (mm)	LENGTH (mm)
3,0	25
3,0	30
3,0	40
3,0	50
3,0	60

MEDIUM GAUGE CSK HEAD



2,8	25
2,8	30
2,8	40
2,8	50
3,5	60
3,5	70
3,5	80

FLUTED NAILS



- Always use eye protection when driving masonry nails
- A good quality nail for safer fixing
- Average penetration into concrete is 20 25mm.
 Into softer materials deeper penetration is required

MULT FIX FRAME ANCHORS

DIA (mm)	LENGTH (mm)
10	120
10	140
10	160



- Works in brick and concrete
- Through frame fixing
- Positive fix screwed in to align frame properly
- heller SDS-plus or masonry drills available for each size


ZINC-ALLOY NAIL-INS

HOLE SIZE	DIA	LENGTH
5mm	5mm	22mm
6mm	6mm	30mm
6mm	6mm	40mm
6mm	6mm	50mm



- Simple hammer fixing
- Excellent security fixing
- Fixes into brick and concrete
- Galvanized nail with zinc-alloy body
- Stronger than nylon hammer screws for security applications

PIPE CLIPS

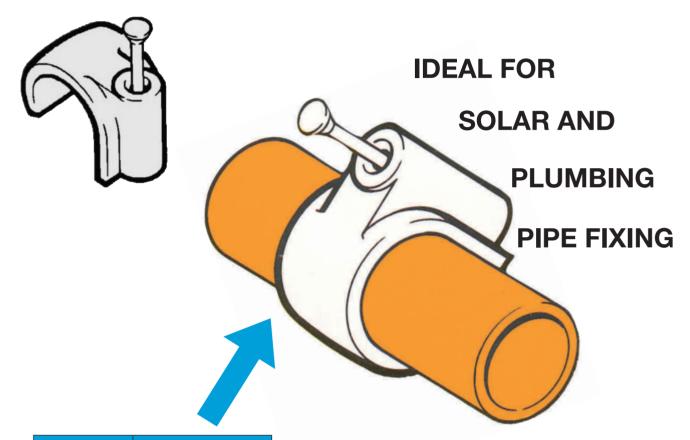

SIZE REF NO	FITS OD PIPE SIZE
#16	15/16mm
#22	22mm
#28	28mm

SIZE	FITS OD
REF NO	PIPE SIZE
#19	19/20mm

FITS
ELECTRICAL
20MM CONDUIT


- STRONG FLEXIBLE CLIP (NO MORE CRACKED) SADDLES
- NO MORE LOOSE PIPE FROM BROKEN SADDLE
- GOOD QUALITY MASONRY NAIL



MULT®FIX® BROLLY ANCHORS

BROLLY ANCHOR (not to scale)	SIZE REF	THREAD SIZE	HOLE SIZE	GRIP RANGE
	BA3	M3	8mm	3mm – 12mm
Or Company	BA6	M5	10mm	4mm – 10mm
	BA8	M5	10mm	6mm – 13mm
0	ВА9	M5	10mm	14mm – 32mm
	BA11	M6	11mm	3mm – 16mm
	BA13	M6	11mm	14mm – 32mm






THIS EFFICIENT FIXING
ENABLES A PERMANENT
FIXING POINT TO
BE ESTABLISHED ON
HOLLOW MATERIALS

SPRING TOGGLES

DIA	SCREW LENGTH
M4	50mm
M5	60mm
M6	75mm

- Zinc-plated
- A hollow- material fixing especially useful when fixing onto materials thicker than 25mm
- Standard thread sizes enable longer screws to be used



HOLLOW BRICK PLUGS

M6 x 36
M8 x 50
M10 x 60
M12 x 70
M14 x 70



Provides a secure fixing on hollow brick by knotting up behind the material



Wera QUALITY PRODUCTS

BIT HOLDERS











TH GOLD



FOR WOOD FIXING



TZ GREY



FOR METAL FIXING



LONGER LENGTHS, ALL DRIVES



SQ#	1 x 25
SQ#	2 x 25
SQ#	2 x 50





_	PZ	1 x 25
PH	PZ	2 x 25
PH	PZ	3 x 25



TX	10 x 25
TX	15 x 25
TX	20 x 25
TX	25 x 25
TX	30 x 25
TX	40 x 25

_	PZ	1 x 50
РН	PZ	2 x 50
PH	PZ	3 x 50





LONGER LENGTH BITS AVAILABLE
50
70
90
125
150

Wera STAINLESS STEEL BITS

STAINLESS STEEL POZI BITS





No more of this

STAINLESS STEEL PHLLIPS BITS





Rust prevented by use of stainless steel bit



TORX BITS FOR THAT REALLY TOUGH JOB!





TORX 40



IMPAKTOR
BIT-HOLDER



6 Marinus Road Marconi Beam, Milnerton, Cape Town **021 552 0383** 7 Vasco Boulevard Goodwood, Cape Town **021 591 9129**

1055 Ridge Road Laser Park, Honeydew Roodepoort **011 791 1851**

IMPAKTOR BITS



ROOFING & CLADDING - STEEL FIX

SELF-DRILLING ROOFING SCREWS FOR STEEL

- All screws comply with AS3566
- Warranties provided
- Traceability
- Good availability



CLASS 3 AND 4		
DIA	LENGTH	
#12	19	
#12	25	
#12	40	
#12	50	
#12	65	
#12	75	
#12	90	
#12	115	
#12	125	
#12	150	
#12	180	

Lengths available 19mm - 180mm

COLOUR HEADS AVAILABLE IN CLASS 3 & CLASS 4











YELLOW ZINC		
DIA	LENGTH	
#12	19	
#12	25	
#12	30	
#12	38	
#12	50	
#12	65	
#12	70	
#12	75	
#12	85	
#12	90	
#12	125	
#14	25	
#14	65	
#14	75	
#14	95	
#14	110	
#14	115	
#14	120	
#14	125	
#14	150	
#14	160	

SELF-DRILLING SCREWS FOR STEEL

STITCHING SCREWS

CREWS STITCHING SCREWS

YELLOW ZINC

CLASS 3 & CLASS 4





RUST RESISTANT SELF-DRILLERS

Bi-METAL SELF-DRILLERS



STAINLESS STEEL SELF-DRILLERS

6	É		-	100	
		112			
		1	1		
		甘			
		1	Ì		
		TIT	6		
		U			
		1	2		

DIA	LENGTH	
Pŀ	12	
4,2	13	
4,2	19	
4,2	25	
4,2	32	
4,2	38	

DEEP DRILLER SELF-DRILL SCREWS



WAFER HEAD SELF-DRILLING SCREWS





SIZES AVAILABLE		
4,8	16mm	
4,8	22mm	
4,8	45mm	
4,8	65mm	





SIZES AVAILABLE		
4,8	65mm	
5,5	85mm	
5,5	115mm	
5,5	125mm	
5,5	150mm	

SELF-DRILLING SCREWS FOR STEEL

B8 - CLASS 4, CATEGORY 5!



Timberfix® SCREWS FOR TIMBER

B8 - CLASS 4, CATEGORY 5!









LIGHT STEEL FRAME (LSF)





CLASS 3 RUSPERT

DIA	LENGTH	DRIVE
#8	32	PH2
#8	32	PH2

ZINC PLATED

DIA	LENGTH	DRIVE
#12	55	PH3
#12	70	PH3

BUGLE HEAD SELF-DRILL



SELF-DRILL DRY-WALL



FRAME FIXINGS

Hex Head Cone Point for pre-drilled holes



LSF section to pre-drilled hole



ROOFING & CLADDING - TIMBER FIXING

Timberfix° TYPE 17 ROOFING SCREWS



COLOUR HEADS AVAILABLE











DIA (mm)	LENGTH
5.5	28
5.5	38
5.5	50
5.5	65
5.5	75
5.5	90
5.5	115
5.5	125
5.5	150
6.3	50
6.3	65
6.3	90
6.3	150

IN Y/ZINC CLASS 3 CLASS 4 AND

PLASTIC CAPS FOR HEX SCREWS

B8



EPDM BONDED WASHERS TO SUIT NON-CONDUCTIVE ALUMINIUM, STEEL, STAINLESS STEEL.

19mm





26mm




Grommets






ROOFING & CLADDING - TIMBER FIXING

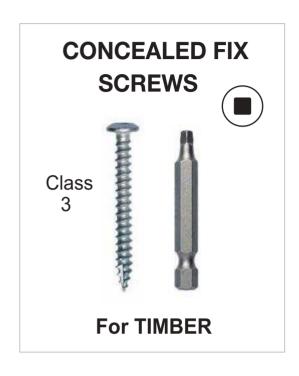





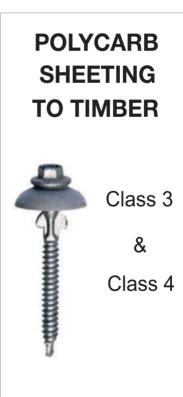



BLIND RIVETS



Bulb-tite/
Multi-tite
Rivets for
stitching
applications



All rivets available in diameters: 3,2 4,0 4,8 Lengths from: 6,0mm to 40mm.

RIVET WASHERS







COUNTERSUNK COLOUR RIVETS





DOME COLOUR RIVETS



White, ivory, and charcoal rivets especially stocked for guttering applications

Refer to page 62 for high speed drills to use with rivets

RIVETING TOOLS

LAZY-TONG TYPE RIVETER



3,2 Aluminium & steel 4,0 Aluminium & steel 4,8 Aluminium

HAND RIVETER



3,2 Aluminium & steel 4,0 Aluminium 4,8 Aluminium

LONG ARM RIVETER



3,2 Aluminium & steel 4,0 Aluminium & steel 4,8 Aluminium

MULT FIX WIRE HANGERS



WIRE HANGER

A purpose-made anchor for fixing ceiling wire hangers or suspending signs into **concrete**

Hole size: 6mm

M6 x 60

PURLIN CLIP



Size: 20 x 40

For suspending ceiling from Purlins

SUSPENSION ANCHOR

A fixing anchor made especially for suspended ceilings and for signage that needs to be suspended.

Hole size: 6,5mm

Effective in brick and concrete

heller bits available for that tough concrete!



MULT FIX SLEEVE ANCHORS



SIZE	HOLE SIZE	THREAD SIZE	MAX FIXING THICKNESS
8 x 40	8	6	5
8 x 65	8	6	15
10 x 50	10	8	10
10 x 60	10	8	20
10 x 75	10	8	25
10 x 100	10	8	50
12 x 60	12	10	10
12 x 75	12	10	20
12 x 125	12	10	60
16 x 65	16	12	10
16 x 110	16	12	40
16 x 150	16	12	75
20 x 75	20	16	15
20 x 100	20	16	30
20 x 150	20	16	50

- Sleeve anchors are effective in brick and concrete if accurate hole sizes are drilled.
- heller SDS Plus bits are recommended.
- Ideal for thorough-fixing applications.

MULT FIX DROP-IN ANCHORS

ANCHOR PUNCH

This anchor is expanded by hammering on the punch inserted into the anchor which must be seated on bottom of hole.





- Bright zinc-plated
- For fixing into concrete
- Can be set at any depth
- Ideal for threaded rods. Pre-assembled anchor. Four-way expansion

REF	THREAD DIA (mm)	THREAD DEPTH (mm)	O/A LENGTH (mm)	DRILL SIZE (mm)
ND 6	6	11,5	25	8
ND 8	8	14	30	10
ND 10	10	14	40	12
ND 12	12	20	50	16
ND 16	16	25	60	20
ND 20	20	35	80	25

BRASS NON-DRILL ANCHOR

This anchor is expanded when the bolt or set screw is screwed into the anchor's thread



THREAD	ANCHOR LENGTH	HOLE SIZE (mm)
M6	24	8
M8	31	10
M10	34	12



MULT FIX ROTARY HAMMER

MBH2-24DRE



TECHNICAL DATA

Input power	(W)	790 W
-------------	-----	-------

Impact energy (J)	2.7
-------------------------------------	-----

Max. drilling capacity(mm)	24 (in concrete)
--	------	--------------

No	load	speed	(rpm	0-1300

	Impact rate	(bpm)	0-4200
--	-------------	-------	--------

Weight (kg) 2.8 k	a
VVCIGITE (ING	/ Z.O K	ч

Length/Height (mm)	367/210
	• • • • • • • • • • • • • • • • • • • •



heller SDS-PLUS HAMMER BITS

A FULL RANGE OF SIZES EX STOCK!

MULT is the sole South African distributor of heller SDS-Plus hammer bits

DIA (mm)	EFF DRILL LENGTH
4.0	50
5.0	50
5.0	100
5.5	50
5.5	100
6.0	50
6.0	100
6.0	200
6.0	300
6.5	50
6.5	100
6.5	150
7.0	100
7.0	150
8.0	100
8.0	150
8.0	200
8.0	400
9.0	150
10.0	50
10.0	100
10.0	150
10.0	200
10.0	250
10.0	400
10.0	550
11.0	100
12.0	100
12.0	150
12.0	200
12.0	400
12.0	550

DIA	EFF DRILL
(mm)	LENGTH
12.0	950
13.0	100
14.0	100
14.0	150
14.0	200
14.0	250
14.0	400
15.0	100
15.0	150
15.0	400
16.0	100
16.0	150
16.0	250
16.0	400
16.0	550
16.0	950
18.0	150
18.0	250
18.0	400
20.0	150
20.0	250
20.0	400
20.0	550
20.0	950
22.0	200
22.0	400
24.0	200
24.0	400
25.0	200
25.0	400
26.0	200
26.0	400



Bionic cutting edge sharp tooth profile with side-grinding zones for quick drill advance.



Twinmax spiral for optimised transfer of the impact energy and removal of drilling waste due to the computer-optimised spiral profile.



Sizes from M4 – M26 up to 950mm LONG



This is a product for you if you are tired of poor quality. This is a well-priced, good quality product

heller SDS- PLUS TRIJET

EXTRA LONG LIFE IN CONCRETE



ACCURATE HOLES SIZE IN TOUGH CONCRETE



Multi-Cutter Diameters 5 – 16mm

DIA (mm)	EFF LENGTH
5,0	50
5,5	50
6,0	100
6,0	200
7,0	100
8,0	100
10,0	100
12,0	100
12,0	150
12,0	400
14,0	100
14,0	150
14,0	200
16,0	150
16,0	400

For that **REALLY** tough concrete!

TOUGH AGAINST REBAR

DON'T BUY
CHEAP, SAVE
YOURSELF
MONEY AND
BUY HELLER
TRIJET

Other lengths available on request.



heller DRILLING SYSTEM



TOP QUALTITY RATIO CORE DRILLS

From 40mm to 150mm Lengths 300mm to 1500mm

CORE RATIO PILOT BIT.



SDS-MAX STAR BREAKER



EXT SHANK





SIZES (mm)	
40,0	
50,0	
65,0	
80,0	
90,0	
100,0	
125,0	

CORE

IDEAL FOR AIR-CONDITIONING INDUSTRY

DIA (mm)	LENGTH
55,0	550
65,0	550

INDIVIDUAL PARTS ARE REQUIRED

150.0

heller TRIJET SDS-MAX



Dia (www.)	Working Length	Overall Length
12	200	340
12	400	540
14	200	340
14	400	540
16	200	340
16	400	540

DIAMETERS 12mm, 14mm, 16mm



SEE
Y-CUTTER
FOR DIA'S
18MM-50MM
ON PAGE 59


- Fast dust clearance
- Long life
- Reduced stress on tool and operator
- Quality for hard concrete

Other lengths available on request.



heller Y-CUTTER SDS-MAX





Up to 1200mm available ex-stock.



Diameters 18mm to 50mm



Dia	Working	Overall
	Length	Length
(mm)	(mm	
Ø		
18	200	340
18	400	540
18	800	940
20	200	320
20	400	520
20	800	920
22	200	320
22	400	520
24	200	320
24	400	520
25	200	320
25	400	520
25	800	920
25	1200	1320
26	200	320
26	400	520
28	400	520
28	600	720
32	600	720
32	1200	1320
38	400	520
40	400	520
40	800	920
40	1200	1320
45	400	520
50	400	520

heller CHISELS

- QUALITY AND MORE

SDS-PLUS





FLAT



GOUGE



TILE



SDS-MAX

POINTED



FLAT



GOUGE



TILE



SPADE



CHASING



TOOTH



FITS ALL SDS-MAX MACHINES

For all chiselling applications the correct tool is available

- Long service life
- Forged from one piece and can be resharpened

MULTFIX MASONRY DRILLS

STANDARD LENGTH

DIA O/A **LENGTH** (mm) 4 75 85 5 5.5 95 100 6 7 100 8 120 10 120 11 120 12 150 14 150 16 150

EXTRA LENGTH

DIA (mm)	O/A LENGTH
6	150
7	150
8	200
10	200

WALL SERIES

DIA (mm)	O/A LENGTH
6	400
8	400
10	400
12	400
16	400

Straight shank masonry drill for 10/13mm chucks

DIAMOND TIPPED HOLE SAWS FOR TILES



M6 M8 M10 M12 M14

CERAMIC MASTER

DIA (mm)	O/A LENGTH
4	60
6	60
8	75
10	80
13	100

For:

Ceramics


Tiles

Glass

Can be resharpened.



MULT FIX HIGH SPEED STEEL DRILLS

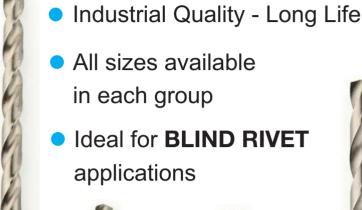



DOUBLE -END STUB

LONG

SERIES



SINGLE -END STUB



STRAIGHT SHANK



YOU
DON'T NEED
TO BE
FRUSTRATED
BY
POOR QUALITY
ASK FOR
A SAMPLE
TO TEST!

COBALT HIGH SPEED DRILLS







For Stainless Steel Drilling

REDUCED

SHANK

Industrial Quality



6 Marinus Road Marconi Beam, Milnerton, Cape Town **021 552 0383** 7 Vasco Boulevard Goodwood, Cape Town **021 591 9129**

1055 Ridge Road Laser Park, Honeydew Roodepoort **011 791 1851**

MULT FIX HINGE BORING BIT

HINGE BORING BIT TCT 35MM







MULT FIX HEAVY DUTY HOLE SAW FOR METAL



DIAMETERS AVAILABLE
M20
M22
M25
M30
M32
M40
M50

IDEAL PRODUCT FOR ELECTRIANS, PLUMBERS ETC.

MULT FIX BI-METAL HOLESAWS

BI-METAL **HOLE SAW**

M14 - M152

Vari-pitch toothing for less vibration and clean cutting, good true running.





DIA (mm)	LENGTH (mm)	SCREW THREAD
14,0	32,0	1/2" – 20
16,0	32,0	1/2" – 20
17,0	32,0	1/2" – 20
19,0	32,0	1/2" – 20
20,0	32,0	1/2" – 20
21,0	32,0	1/2" – 20
22,0	32,0	1/2" – 20
24,0	32,0	1/2" – 20
25,0	32,0	1/2" – 20
27,0	32,0	1/2" – 20
29,0	32,0	1/2" – 20
30,0	32,0	1/2" – 20
32,0	32,0	5/8" – 18
33,0	32,0	5/8" – 18
35,0	32,0	5/8" – 18
37,0	32,0	5/8" – 18
38,0	32,0	5/8" – 18
40,0	32,0	5/8" – 18
41,0	32,0	5/8" – 18
43,0	32,0	5/8" – 18
44,0	32,0	5/8" – 18
46,0	32,0	5/8" – 18
48,0	32,0	5/8" – 18
50,0	32,0	5/8" – 18
51,0	32,0	5/8" – 18
52,0	32,0	5/8" – 18
54,0	32,0	5/8" – 18

DIA (mm)	LENGTH (mm)	SCREW THREAD
57,0	32,0	5/8" – 18
59,0	32,0	5/8" – 18
60,0	32,0	5/8" - 18
64,0	32,0	5/8" – 18
65,0	32,0	5/8" – 18
67,0	32,0	5/8" – 18
68,0	32,0	5/8" – 18
70,0	32,0	5/8" – 18
73,0	32,0	5/8" – 18
76,0	32,0	5/8" – 18
79,0	32,0	5/8" – 18
83,0	32,0	5/8" – 18
86,0	32,0	5/8" – 18
89,0	32,0	5/8" – 18
92,0	32,0	5/8" – 18
95,0	32,0	5/8" – 18
98,0	32,0	5/8" – 18
102,0	32,0	5/8" – 18
105,0	32,0	5/8" – 18
108,0	32,0	5/8" – 18
111,0	32,0	5/8" – 18
114,0	32,0	5/8" – 18
121,0	32,0	5/8" – 18
127,0	32,0	5/8" – 18
140,0	32,0	5/8" – 18
142,0	32,0	5/8" – 18



BOSCH POWER TOOLS



IMPACT DRIVER





PERCUSSION DRILL



115mm GRINDER



230mm GRINDER





SETS, NUTS & BOLTS



THREADED ROD SUPPLIED EXTENSIVELY WITH


NUTS, WASHERS AND FENDER WASHERS.



6 Marinus Road Marconi Beam, Milnerton, Cape Town **021 552 0383** 7 Vasco Boulevard Goodwood, Cape Town **021 591 9129**

1055 Ridge Road Laser Park, Honeydew Roodepoort **011 791 1851**

DIAMOND BLADES

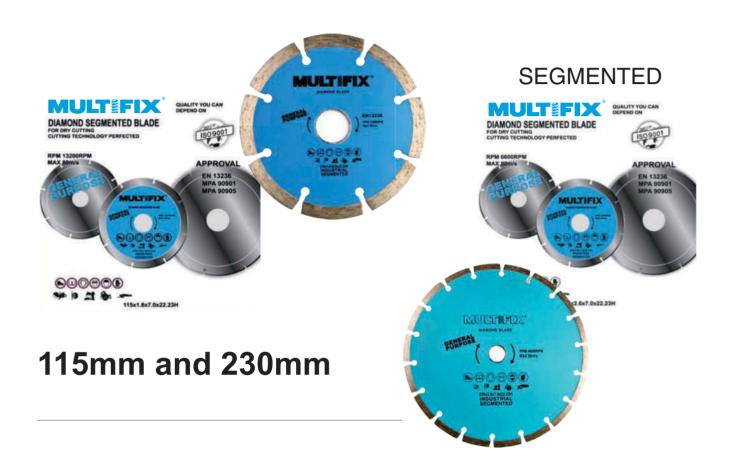

MULT FIX CONTINUOUS RIM TURBO DIAMOND BLADE



No jagged edges

230mm



BUTYL TAPE FOR SEALING



Seals and bonds IBR and corrugated sheeting



The light grey Butyl tape is ideal for polycarb and fibreglass sheeting!

(black line used in diagram)



TACK BAND AD HIGH PERFORMANCE SELF-ADHESIVE BUTYL SEALING TAPE WITH The search of th


STRONG ADHESION TOP QUALITY LIKE YOU'D EXPECT FROM MULT FIX



6 Marinus Road Marconi Beam, Milnerton, Cape Town **021 552 0383** 7 Vasco Boulevard Goodwood, Cape Town **021 591 9129** 1055 Ridge Road Laser Park, Honeydew Roodepoort **011 791 1851**

STEEL CUTTING DISCS


MAXXCUTT® BY NAME MAXXCUTT® BY NATURE!

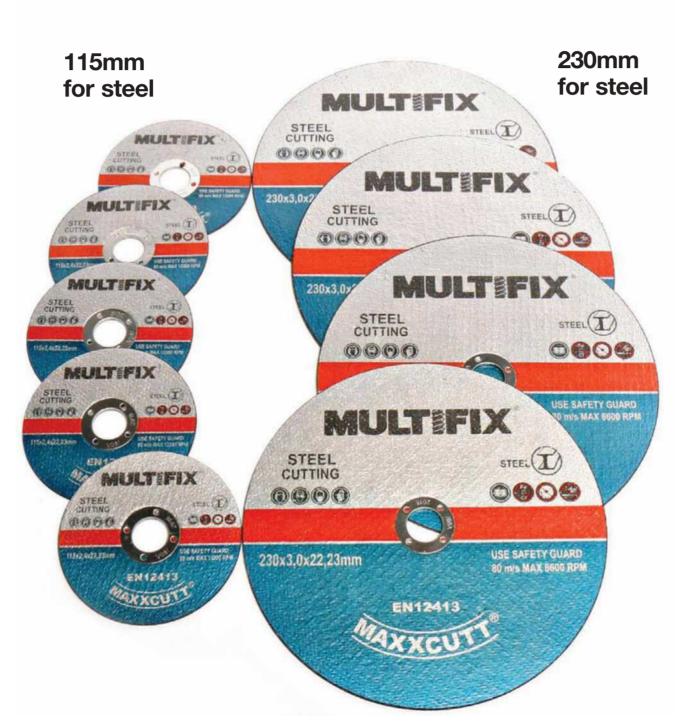

Top quality and durability – as you'd expect from **MULT**§FIX®

MULT FIX MASONRY & STEEL

115 x 1,0
INOX STEEL CUTTING



STANDARD QUALITY, BUT STILL GOOD!

115 x 1,0 LONG LIFE INOX STEEL CUTTING



FOR THOSE EXTRA TOUGH JOBS!



355MM STEEL CUTTING



230MM MASONRY CUTTING



6 Marinus Road Marconi Beam, Milnerton, Cape Town **021 552 0383** 7 Vasco Boulevard Goodwood, Cape Town **021 591 9129**

1055 Ridge Road Laser Park, Honeydew Roodepoort **011 791 1851**

SAW BLADES



230mm TCT for wood and 255mm TCT for Aluminium



DRY-CUT ROOF SHEET BLADE!



Jigsaw Blades for all types of power tools



QUALITY SENSIBLY PRICED!

185mm Roofing Blades 185 x 1,7 x 70T x 20mm

Utility Cutting Knife Tool and Blades





Industrial Quality Blades in Dispenser



Blades in 100-pack safety dispenser and 10-pack safety dispenser

SPACERS FOR CONCRETE

WHEEL SPACER FOR COLUMNS



DELIVERED TO SITE

CIRCULAR FOR DECKING



Packed in bags of 500 or 1000 depending on size

COVER
20
25
30
40
50
60
75

FIBRE CEMENT SPACERS (BONE-SHAPED)



COVER
25
30
35
40
50
60
75
100

	COVER
	20
	25
	30
	35
	40
	50
1	

FIBRE CEMENT SPACERS (HORIZONTAL)



Another part of the complete **MULT FIX** service



WIRE NAILS

WIRE NAILS

(Packed in 5kg and 25kg cartons)



PANEL PINS

(Packed in 5kg cartons)



CLOUT NAILS

(Packed in 25kg cartons)



PERSONAL PROTECTIVE EQUIPMENT



BLUE FACE MASK DISPOSABLE



FACE MASK KN95

NON CONTACT INFRARED THERMOMETERS

EX STOCK



LED DISPLAY



SUBJECT TO AVAILABILITY



SUNDRIES

SILICONE

Various colours available









PU FOAM

CARBON BRUSHES



For Bosch and Makita tools

RAGS FOR CLEANING "MIXED AND WHITE"

CABLE BUDDY



Cable protector

DISCLAIMER

Although every care has been taken for the information provided in this catalogue to be accurate, because of the varied applications and uses of the products MULTIFIX (PTY) LTD, MULTIFIX Fasteners (PTY) LTD and its Directors cannot be held responsible for damage, injury or death caused as a result of one if its products being used. For detailed information on any of our products please contact our Technical Department for detailed specifications, pullout and shear values of each product.

COPYRIGHTS

No part of this catalogue may be copied without written permission from the Directors of MULTIFIX (PTY) LTD.

MULTIFIX (PTY) LTD and MULTIFIX Fasteners (PTY) LTD reserves the right to amend or update the information relating to its products in an ongoing situation of range extension and improvement.



WAREHOUSES









DELIVERY VEHICLES





6 Marinus Road Marconi Beam, Milnerton, Cape Town **021 552 0383** 7 Vasco Boulevard Goodwood, Cape Town **021 591 9129**

1055 Ridge Road Laser Park, Honeydew Roodepoort **011 791 1851**

77

PRODUCT INDEX BY ALPHABETIC DESCRIPTION

Α.	A2 SCREWS:			DIAMOND BLADES 67	
	CHIPBOARD	19		DIAMOND DRILLS	61
	COACH	18		DOME NUTS	66
	DECKING	22		DROP-IN ANCHORS	53
	SELF-TAPPING	21		DRY WALL SCREWS	17
	TIMBER-FIX	48		DITI WITE SCIENS	
	WOOD	20	_		
	WOOD	20	E.	"EPOXIES"	8, 9, 10, 13
	4.2.11.4.8.48.4ED.CCDE14/C	24		EXPANSION PLUGS	33
	A2 HAMMER SCREWS	31		EXTRUSION TOOLS	10
	A2 BOLTS, SETS	66			
	NUTS	66	_		
	FLAT WASHERS	66	F.	FLASHING TAPE	68
				FRAME ANCHORS	35
	A2/A4 STUDS	66			
			G.	GOLD WERA PZ, PH BITS	39 40
Λ	4 D D 4 C D 4 C C	co =0	٠.	GROMMETS	42, 43
A.	ABRASIVES	69, 70		GUNS: CHEMICAL MORTA	-
	ACCESSORIES FOR ROTAR				-
	ADHESIVE EPOXY	13		GUNS: SILICONE	10
	ANGLE GRINDERS	65			
			Н.	HAMMER SCREWS	31
В.	B8 SCREWS	45		HEAVY DUTY HOLESAWS	63
	BARRIER NETTING	75		HEAVY FIXINGS	4, 6, 8
	BATTERY POWER TOOLS			HIGH SPEED STEEL DRILLS	
	BI-METAL SCREWS	43		HOLESAWS	63, 64
		39, 40, 41		HOLLOW CORE DRILLS	57
	BIT HOLDERS			HOLLOW WALL FIXINGS	38
	BITS FOR STEEL	62		TIOLEGIV WALE FIXINGS	30
	BLIND RIVETS + TOOLS	49, 50			
	BLUNT POINT SELF-TAPPE		_		
	BONDED WASHERS	47	I.	I-JET SCREWS	24, 25, 26
	BOLTS + NUTS	66		IMPACT DRIVERS	65
	BOSCH POWER TOOLS	65		IMPAKTOR BITS + HOLDER	S 40, 41
	BRASS ANCHORS	53			
	BROLLY ANCHORS	37			
	BUGLE HEAD SCREWS	17			
	BULB TITE RIVETS	49	J.	JET SCREWS	24, 25, 26
	BUTYL TAPE	68		JIGSAW BLADES	71
			K.		
C.	CABLE BUDDY	75			
٠.	CATEGORY 5 SCREWS	45		LIGHT FIVENCE	
	CARBON BRUSHES	75	L.	LIGHT FIXINGS	32 - 38
	CENTRE DRILLS	63, 64	M.	MASONRY DRILLS	61
	CERAMIC TILE DRILLS	61		MASONRY NAILS	34
	CHEMICAL MORTAR 8, 9, 10, 13 CHISELS FOR ROTARY HAMMERS 60 CHUCKS + KEYS 75			MEDIUM FIXINGS	4, 5, 6, 8
				MULTIFIX ROTARY HAMMER 54	
				MULTI-TITE RIVETS	49
	CLOUT NAILS	73		IVIOLII-IIIL MIVLIJ	7.5
	COBALT STEEL DRILLS	62			
	COLOUR HEADED SCREWS	5 42	N.	NAIL-IN ANCHORS	31
	CORE DRILL FOR CONCRET	ΓΕ/ BRICK 57		NON-DRILL ANCHORS	53
	CUTTING KNIFE BLADES +	TOOLS 71		NUTS AND BOLTS	66
				NUT-SETTERS	48

0.



PRODUCT INDEX BY ALPHABETIC DESCRIPTION

P. PERFORATED SLEEVES 10
PIPE CLIPS 36
POLYESTER CEMENT 10
POURING MORTAR 14
POWER TOOLS BOSCH 65
POZI BITS, PHILLIPS BITS 39, 40, 41
PURLIN CLIPS 51
PULL OUT TEST MACHINES 15

R. RIVETS AND RIVETING TOOLS 49, 50
ROTARY HAMMER BITS SDS 55, 56
ROTARY HAMMER BITS SDS MAX 57, 58, 59
ROTARY HAMMER MACHINES 54

S. SAWBLADES **71**

SCREWS, VARIOUS:

CHIPBOARD 19 COACH 18

CLADDING **42, 43, 44, 45** CONSTRUCTION **27, 28, 29**

DECKING 22 DRY WALL 17

LIGHT STEEL FRAME (LSF) 46

ROOFING: 42 - 48 SECURITY 18 SELF-DRILL 42 - 48 SELF-TAPPING 42 - 46 SKIRTING 17 **STITCHING** 43 **TIMBERFIX** 23 TIMBERFIX MAX 27 - 30 WAFER HEAD 44.48 WING 46

SELF-TAPPING ANCHORS **6,7** SHIELD ANCHORS **4**

WOOD SCREWS 20

SOLAR HEATING PIPE CLIPS 36

SPACERS 72 SPRING TOGGLES 38

STUDS

SUSPENSION ANCHORS 51

T. TESTING MACHINES 15 THREADED ROD 66 THRU ANCHORS 5 THUNDER BOLTS 6, 7 TILE DRILLS 61 47, 48 TIMBERFIX TIMBERFIX MAX 27 - 30 **TORX BITS TYPE 17 SCREWS** TOOLS EXTRUSION + SILICONE 9, 10, 11 TRI-JET HAMMER BITS TWO-WAY EXPANSION PLUGS 33

U. UMBRELLA ANCHORS 37

V.

W. WALL PLUGS 32
WERA BITS 39 – 41
WIRE HANGER 51
WIRE NAILS 73
WOODSCREWS 20

Χ.

Y.

Z. ZINC ALLOY NAIL-INS 35
ZEES CATALOGUE, WE HOPE YOU ENJOY! 1-80



REGISTERED TRADEMARKS

The following are registered trademarks of MULTIFIX (PTY) LTD and MULTIFIX FASTENERS (PTY) LTD.




Timberfix® MAX®

THRU ANCHOR®
i-JET®



MAXXCUTT®


NOTES:-

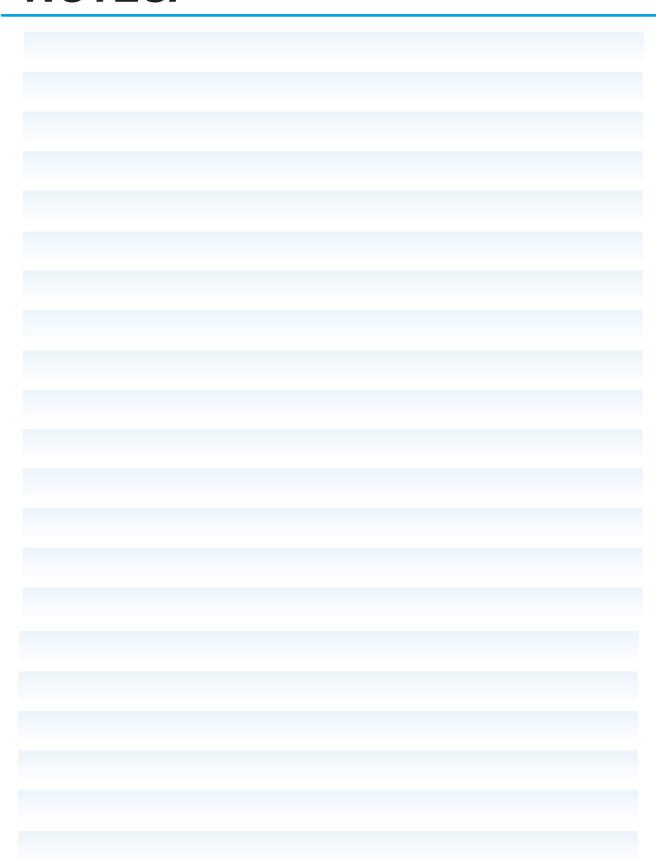

HONEYDEW, ROODEPOORT

LAT: -26,0805 | LONG: 27.9173


GPS COORDINATES 26° 4' 50" S 27° 55' 2" E

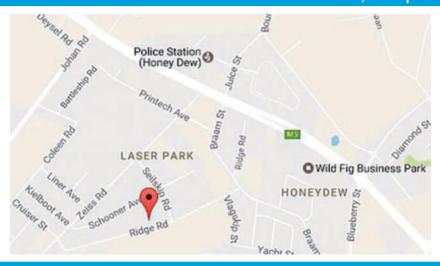

MARCONI BEAM, CAPE TOWN

LAT: -33,8704 | LONG: 18.5070


GPS COORDINATES 33° 52' 13,5" S 18° 30' 25" E

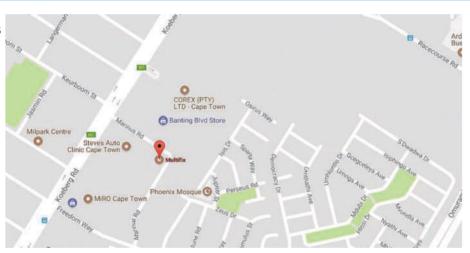

GOODWOOD, CAPE TOWN

LAT: -33,9100 | LONG: 18.5580

GPS COORDINATES 33° 54' 36" S 18° 33' 29" E

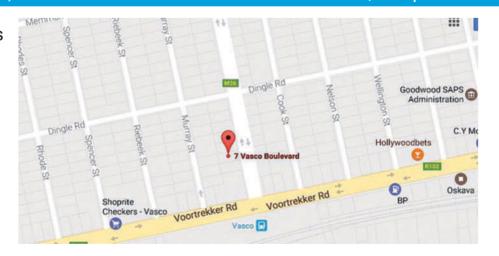

6 Marinus Road Marconi Beam, Milnerton, Cape Town **021 552 0383** 7 Vasco Boulevard Goodwood, Cape Town **021 591 9129** 1055 Ridge Road Laser Park, Honeydew Roodepoort

011 791 1851



FASTENERS R





